





共 通 规 格	
精度等级	JIS B 1704: 1978 3 级
齿 形	格里森
压 力 角	20°
材 料	SUS303
热 处 理	—
齿面硬度	(187HB 以下)



B3

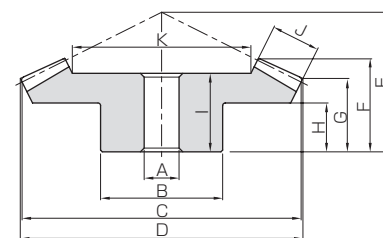

B4

产品型号	齿数比	模数	齿数	形状	孔径	轮毂径	分度圆直径	齿顶圆直径	组装距离	全长	齿顶距离	轮毂长
					A _{H7}	B	C	D	E	F	G	H
SUB1.5-3020 SUB1.5-2030	1.5	m1.5	30	B4	10	30	45	46.24	28	18.53	13.93	8
20			B3	8	25	30	33.13	33	18.63	11.54	8.83	
SUB2-3020 SUB2-2030		m2	30	B4	10	35	60	61.65	40	26.87	21.24	15
20			B3	10	35	40	44.18	45	25.06	16.39	13.33	
SUB2.5-3020 SUB2.5-2030		m2.5	30	B4	15	45	75	77.07	50	34.22	26.55	18
20	B3		12	40	50	55.22	55	31.06	19.24	14.16		
SUB3-3020 SUB3-2030	2	m3	30	B4	15	60	90	92.48	55	35.56	26.86	17
20			B3	15	50	60	66.27	70	40.48	27.09	21.66	
SUB1.5-4020 SUB1.5-2040		m1.5	40	B4	10	38	60	60.88	35	25.01	20.88	15
20			B3	8	25	30	33.61	46	25.54	16.9	14.75	
SUB2-4020 SUB2-2040	m2		40	B4	12	50	80	81.17	45	32.37	26.17	18
20			B3	12	32	40	44.81	60	34.16	21.2	18	
SUB2.5-4020 SUB2.5-2040	3	m2.5	40	B4	15	60	100	101.46	55	39.73	31.46	20
20			B3	12	40	50	56.01	75	43.78	26.5	22.5	
SUB3-4020 SUB3-2040		m3	40	B4	20	70	120	121.76	65	45.85	36.76	24
20			B3	16	50	60	67.22	90	50.81	31.8	27.5	
SUB1.5-4515 SUB1.5-1545	3	m1.5	45	B4	10	36	67.5	68.06	28	20.44	17.59	11
15			B3	8	18	22.5	26.54	47	23.19	13.92	12.5	
SUB2-4515 SUB2-1545		m2	45	B4	12	60	90	90.75	40	30.4	26.12	17
15			B3	10	24	30	35.35	60	29.8	15.89	14	
SUB2.5-4515 SUB2.5-1545	3	m2.5	45	B4	15	60	112.5	113.43	50	38.35	32.65	22
15			B3	12	30	37.5	44.18	75	38.41	19.86	17.5	
SUB3-4515 SUB3-1545		m3	45	B4	20	80	135	136.12	55	40.74	34.18	20
15			B3	15	38	45	53.02	90	45.17	23.84	21.33	

孔长	齿宽	支撑面直径	容许转矩 (N·m)		容许转矩 (kgf·m)		侧隙 (mm)	质量 (kg)	产品型号
I	J	K	弯曲强度	齿面强度	弯曲强度	齿面强度			
16 17	9	27.37 17.05	3.22 2.23	0.46 0.31	0.33 0.23	0.047 0.032	0.05~0.15	0.12 0.064	SUB1.5-3020 SUB1.5-2030
23 22	11	37.56 21.34	7.22 5.01	1.08 0.72	0.74 0.51	0.11 0.074	0.06~0.16	0.27 0.16	SUB2-3020 SUB2-2030
30 28	15	45.61 27.42	14.9 10.3	2.28 1.52	1.52 1.05	0.23 0.15	0.07~0.17	0.55 0.29	SUB2.5-3020 SUB2.5-2030
31 37	17	57.14 34.71	24.8 17.2	3.87 2.58	2.53 1.76	0.39 0.26	0.08~0.18	0.95 0.56	SUB3-3020 SUB3-2030
22 24	10	39.64 17.28	5.23 2.64	0.79 0.40	0.53 0.27	0.081 0.040	0.05~0.15	0.27 0.090	SUB1.5-4020 SUB1.5-2040
27 32	15	48.46 20.92	13.4 6.72	2.07 1.04	1.36 0.69	0.21 0.11	0.06~0.16	0.62 0.19	SUB2-4020 SUB2-2040
35 41	20	60.28 24.56	27.1 13.6	4.29 2.15	2.76 1.39	0.44 0.22	0.07~0.17	1.24 0.41	SUB2.5-4020 SUB2.5-2040
38 47	22	73.81 29.61	44.4 22.4	7.19 3.60	4.53 2.28	0.73 0.37	0.08~0.18	1.89 0.70	SUB3-4020 SUB3-2040
17 22.5	10	46.58 14.75	5.70 1.97	0.72 0.24	0.58 0.20	0.074 0.025	0.05~0.15	0.25 0.041	SUB1.5-4515 SUB1.5-1545
26 29	15	59.04 19.13	14.6 5.03	1.90 0.63	1.49 0.51	0.19 0.065	0.06~0.16	0.82 0.097	SUB2-4515 SUB2-1545
35 37	20	72.84 20.51	29.6 10.2	3.94 1.31	3.02 1.04	0.40 0.13	0.07~0.17	1.38 0.19	SUB2.5-4515 SUB2.5-1545
35 43	23	88.18 22.53	49.9 17.2	6.77 2.26	5.09 1.76	0.69 0.23	0.08~0.18	2.36 0.34	SUB3-4515 SUB3-1545